



Additives of Base and Acid to Oxidative Desulphurization Process of Al-Sumoud Refinery at NRC Baiji

G J Mohammed¹   1 M Abdulqader²   O A Habeeb^{3*}  

1 Oil Products Distribution Company (OPDC), Salahuldeen Branch, Tikrit, Ministry of Oil, Iraq 2 Department of Petroleum Engineering, College of Engineering, Alnoor University, Mosul, Iraq 3 * North Refineries Company Baiji, Ministry of Oil, Iraq

Article information

Article history:

Received 15 September, 2024

Revised 5, February, 2025

Accepted 30 March, 2025

Keywords:

NRC Baiji,
Desulphurization,
Sulfur compounds;
Kerosene;
Acid and Base

Correspondence:

T H Alsalim

taha.hussein@alnoor.edu.iq

Abstract

The removal of sulfur compounds from kerosene via extraction is based on the fact that sulfur compounds are more soluble than hydrocarbons in appropriate solvents. The most attractive feature of extractive desulphurization is its applicability at low temperatures and low pressure. The samples of kerosene were used in this research obtained from North Refineries Company Baiji (NRC), Al-Sumoud refinery. Production of high-quality kerosene fuel decreases its sulphur content of it, and thus burns with the least amount of CO₂. One of the main risks to the combustion properties of kerosene and the atmosphere is secondary pollutants such as sulfur and other impurities. The contamination of the sulfur creates a strong odor, which may cause some problems if not removed. In this study, additive materials were added to kerosene to decrease the percentage of sulfur content production and improve kerosene's fuel properties. In this research, the best temperature of removal was 70 °C for base and acid, the removal average of sulfur was from 1880 ppm, while the removal average of sulfur was from 1600 to less than 600 ppm for the Al-Sumoud refinery, without effect on the other specification, especially specific gravity is considered the main property, ruler test.

DOI: <https://doi.org/10.69513/jnog.v2.i1.ar1> ©Authors, 2025, College of Engineer, Alnoor University.

This is an open access article under the CC BY 4.0 license (<http://creativecommons.org/licenses/by/4.0/>).

1-Introduction

As fossil fuel prices continue to rise, oil companies will for environmental protection, desulfurization plays a critical role in mitigating the impacts of toxic pollutants. To this end, several experiments have been conducted on single metal oxides and mixed metal oxides as sorbents [1]. Kerosene is a liquid hydrocarbon fuel with multiple uses, including powering jet and rocket engines, heating homes,

heating water, and cooking. To protect human health and reduce environmental hazards, environmental regulations that limit sulfur content to very low levels have been introduced in many countries over the past few decades [2]. Additionally, sulfur should be removed from petroleum fractions, as it can poison catalysts, corrode surfaces, and cause air pollution [3]. Abraham Gesner discovered kerosene, a petroleum byproduct, in 1853. Gesner, a British

surgeon, developed a method for removing asphalt from inflammable liquids [4]. Mercaptans, sulfides, disulfides, products is undesirable because of the pollution they cause. However, this can represent significant challenges for petrochemical operations in meeting environmental criteria. The desulfurization procedure determines how these sulfur compounds are removed [5]. Gesner devised a method to separate the inflammable liquid from asphalt. The term kerosene comes from the Greek word kerosene. Kerosene (also known as jet fuel) is a flammable hydrocarbon liquid that is commonly used to power jet engines in aircraft and some rocket engines. It is also widely used as a cooking and lighting fuel for fire toys [6]. Kerosene is a liquid hydrocarbon fuel that is commonly used to power jet aircraft engines (jet fuel) and some rocket engines [7]. It is also widely used in fire toys as a cooking and lighting fuel [8]. Recently, researchers have sought

and thiophenes are the most prevalent chemicals found in gasoline. The presence of these groups in petroleum alternative approaches to improve product quality [9]. The process does not change the chemical structure of fuel oil components. To make the separation process efficient, the solvent must be carefully selected to meet several requirements. The solvent must have a boiling point different than that of the sulphur-containing compounds, and it must be inexpensive to ensure the economic feasibility of the process [10]. The Sulphur compounds must be highly soluble in the solvent [11]. The aim of this study was to improve the kerosene product at Al Sumoud Refinery of the North Refineries Company, Baiji, by reducing its sulphur content. Thus, increasing combustion efficiency and reducing CO₂ emissions, as well as reducing acidic residues and calcification resulting from sulfur in kerosene fuel.

Materials and Methods

2.1 Kerosene sample preparation

The sample of kerosene was used in this research, collected from North Refineries Company (NRC) Baiji. Obtained from Al-Sumoud refinery Kerosene sample with density of 0.7845 @15.6 °C g/cm³, tank number 3107 FA [12].

2.2 Additive processes

Figure 1 depicts the sweetening process of kerosene with varying percentages of acid and base additives. The percentage addition method was used, as following steps. The raw material was stored in the feed tank, and the heat exchanger exchanged temperatures with the final product. P1 exchanged the raw material's temperature with hot oil to reach a temperature of 60-70 °C. P H₂SO₄ 1 mixes the feed material with H₂SO₄ at a concentration of 98 %, with an addition of 1%. Decanter No [13]. 1 straddled the product. The feed material is mixed with H₂SO₄ at a concentration of 98 % by mixer No. 2, with a 0.8 % addition by P H₂SO₄ 2. Decanter No. 2 straddled the product. The feed material is mixed with H₂SO₄ at a concentration of 98% by mixer No. 3 with a 0.7% addition by P H₂SO₄ 3. To extract the gases, the product was straddled by a decanter (3a - 3b) with a vacuum pump. The feed material is mixed with NaOH at a concentration of 25 % by mixer No. 4, with a 0.8% addition by P NaOH 1. Decanter No. 4 straddled the product. The nutrient is mixed with water at a 0.4% addition ratio by mixer No. 5. A decanter straddled the finished product (5a – 5b). P4 pumped the finished product to the heat exchanger, which reduced the temperature before delivering it to the distribution stations

2.3 Analytical procedure

The specific gravity (Sp.gr) of the kerosene test was calculated according to the standard method (ASTM D 1298) [12]. The physical properties were carried out based on the international code and standard American Society for Testing and Materials (ASTM D-3080) [15]. At the laboratories and quality control department in NRC Baiji. The FTIR test has been conducted before and after the desulphurization process via extraction.

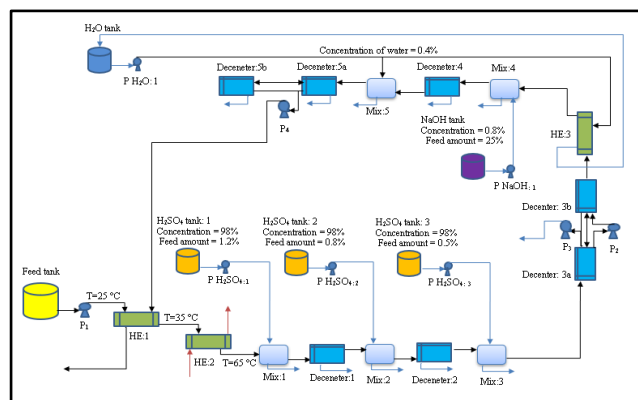


Figure 1:Desulphurization process of the Kerosene product unit

3. Results and discussions

3.1 Physical properties of kerosene sample

Table 1 shows the physical properties of the kerosene sample produced from Al-Sumoud refinery at NRC Baiji, before the desulphurization process. This specification was done depending on the (ASTM D-978) [16].

No.	Test	Kerosene
1	Density@15.6 °C g/cm ³	0.7845
2	A.P.I	48.8
3	Dr.Test	+ve RSH
4	Total Sulfur ppm	1600
5	Mercaptan ppm	336.4
6	H ₂ S ppm	Nil
7	Flash Point °C	52
8	Color	+12

3.2 FTIR spectrum

The FTIR spectra of the kerosene samples before and after the process are shown in Figure 2. The results indicate the presence of mercaptans, as evidenced by a prominent band at 3398.57 cm⁻¹ due to desulphurization. A less intense medium band at 1376 cm⁻¹ represents the S=O asymmetric vibration, which gives an indication of the sulphone's chlorides, sulphonates, sulphones, or sulphoxides. A wideband at 3417 cm⁻¹ shows the presence of the NH or OH, which may correspond to the bond associated with sulphonamides. The FTIR spectra of the kerosene oil treated with HgCl₂ (10 %) and Ca (OH)₂ (5%) is indicated in Figure 2 before and after. The spectra show that bands in this range, indicating mercaptans S-H (at 2365 cm⁻¹) and S=O (at 1376 cm⁻¹), are weaker in intensity in (after) as compared to the spectra of the original sample. In the spectrum (before), the band at 2356 cm⁻¹ is absent, indicating that substituted thiols have undergone desulfurization. The FTIR results also indicated that the functional groups of the NRC Baiji fuel samples were identical [17].

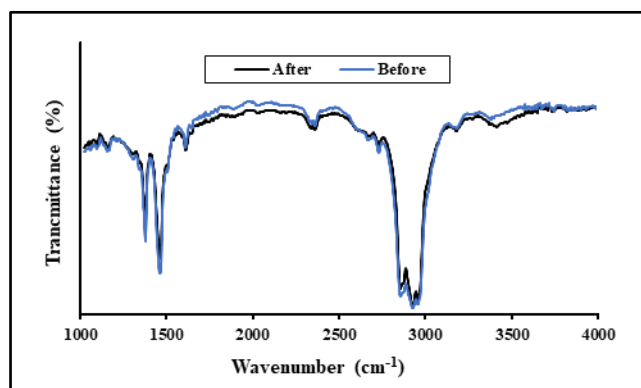


Figure 2: FTIR Spectrum of raw material kerosene and after desulphurization process

3.3 The oxidative desulphurization process

The oxidative desulphurization processes were conducted using an acid-base additive to the kerosene sample in order to reduce the sulfur content [18]. The effects of factors such as temperature, sodium hydroxide concentration, Sulfuric acid concentration, and water content on sulfur content were studied.

3.3.1 Effect of temperatures

The effect of temperature on sulfur removal is determined as shown in Figure 3. The sulfur content was reduced, as shown in Figure 2. 2.5 of H₂SO₄ at a concentration of 98 % (a fixed amount) was added with 0.8 of NaOH at a concentration of 25 % (a fixed amount) with 0.4 of water (a fixed amount) to varying temperatures. The sulfur content of kerosene decreased, as shown in Table 5. The results showed that at 50 °C, sulfur content was 1000 ppm; at 60 °C, 800 ppm; at 70 °C, 580 ppm; and at 80 °C, 700 ppm, due to temperature and concentration effects. The best temperature was 70 °C with a low sulfur content of 580 ppm [19]. The sulfur concentration decreased from 1000 to below 600 ppm as the temperature increased, reaching 800 ppm at 80 °C, indicating that 70 °C is the optimal temperature for the reaction.

Table 2: Percentage of H₂SO₄, NaOH, and H₂O added to kerosene at different temperature Sulpur

Tempret ure (°C)	H ₂ SO ₄ Concentrati on (99%)	NaOH Concentrat ion (25 %)	H ₂ O (L)	Sulp ur (ppm)
70	1.0	0.8	0.4	1200
70	1.5	0.8	0.4	900
70	2.0	0.8	0.4	700
70	2.5	0.8	0.4	580

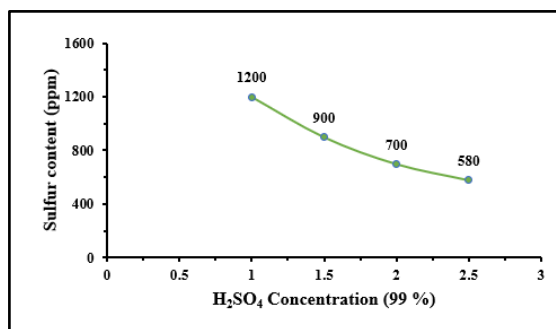


Figure 3: Relation between H₂SO₄,with NaOH, and H₂O at different temperature

3.3.2 Effect of sulfuric acid additive with 99 % H2SO4

The best temperature was 70 °C to the reduced percentage of sulfur content in kerosene as in Figure 4. The temperature was fixed at 70 °C with 0.8 of NaOH at a concentration of 25 % (a fixed amount), with 0.4 of water (a fixed amount), with varying H2SO4 1.0, 1.5, 2.0, and 2.5 with 99 % concentration. The results showed a decrease in the sulfur content in kerosene according to the results shown in Table 3. These results showed sulfur content was 1200 ppm at 1.0 of H2SO4, sulfur content was 900 ppm at 1.5 of H2SO4, sulfur content was 700 ppm at 2.0 of H2SO4, sulfur content was 580 ppm at 2.5 of H2SO4. The best removal process was 580 ppm of sulfur at 2.5 of H2SO4 at 70 °C [20].

Table 3: Percentage 99% of H2SO4, NaOH, and H2O added to kerosene at 70 °C Sulpur

Table 4: Percentage 0.8 of NaOH, H2SO4, and H2O added to kerosene at 70 °C

Tempret ure (°C)	H ₂ SO ₄ Concentrati on (99%)	NaOH Concentrat ion (25 %)	H ₂ O (L)	Sulp ur (ppm)
70	2.5	0.3	0.4	880
70	2.5	0.5	0.4	750
70	2.5	0.7	0.4	620
70	2.5	0.8	0.4	580

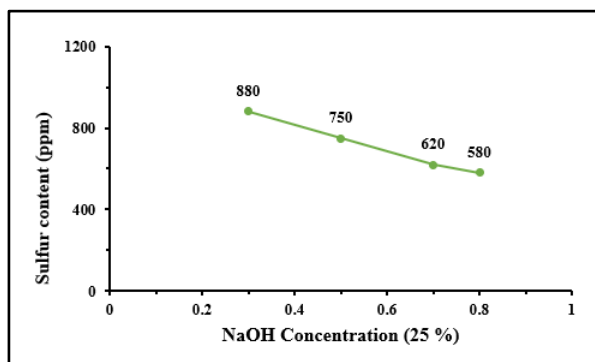


Figure 4: Relation between H2SO4, NaOH, and H2O at 70 °C

3.3.3 Effect of sodium hydroxide additive with 0.8 NaOH

The best temperature was 70 °C to the reduce percentage of sulfur content in kerosene as in Figurer 5. The temperature was fixed at 70 °C with 2.5 of H2SO4 at a

concentration of 99 % (a fixed amount), with 0.4 of water (a fixed amount), with varying NaOH 0.3, 0.5, 0.7, and 0.8 with concentration 25 %. The results showed a decrease in the sulfur content in kerosene according to the results shows in Table 4. These results showed that sulfur content was 880 ppm at 0.3 NaOH, 750 ppm at 0.5 NaOH, 620 ppm at 0.7 NaOH, and 580 ppm at 0.8 NaOH. The best removal process was 580 ppm of sulfur at 0.8 of NaOH at 70 °C [21].

Table 4: Percentage 0.8 of NaOH, H2SO4, and H2O added to kerosene at 70 °C Sulpur

Table 5: Specifications of kerosene sample results before and after desulphurization processing

No.	Test	Before processing	After processing
1	Density@15 °C g/cm ³	0.7845	0.7845
2	A.P.I	48.8	48.8
3	Dr.Test	+ve RSH	Neg RSH
4	Total Sulfur ppm	1600	Less Than 600
5	Mercaptan ppm	336.4	Less Than 3
6	H ₂ S ppm	Nil	Nil
7	Flash Point °C	52	52
8	Color	+12	>+30
9	Distillation		
	I.B.P °C	160	160
	5%	170	170
	10%	174	174
	50%	194	194
	90%	235	235
	E.P °C	255	255
	T.D%	98	98
	Loss%	0.5	0.5
	Res%	1.5	1.5

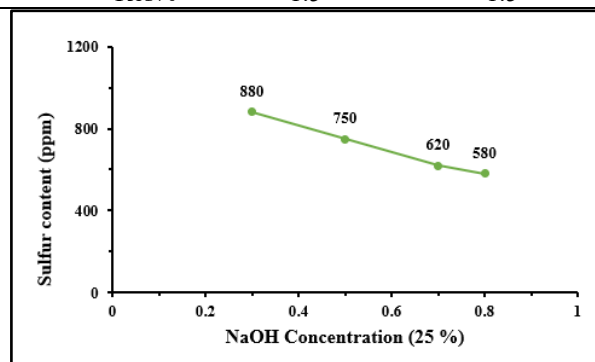


Figure 5: Relation between H2SO4, NaOH, and H2O at 70 °C

4. Conclusion

The desulphurization of kerosene was studied via base and acid by washing. It was found that the washing method is a more effective. The kerosene sample has sulfur content was decreased from 1200 to 750 at 70 °C. The results showed that there was no effect on the density of kerosene, as well as the effect of distillation specifications. This indicates the effectiveness of the desulphurization process without affecting the basic specifications. This contributes to producing high-quality kerosene fuel and ignites by releasing fewer amounts of CO₂ gas and does not cause damage to equipment because it contains a low percentage of sulfur.

5. Acknowledgment

The authors would like to thank Hussain Talib Abood, General Director of Oil Products Distribution Company (OPDC). The authors would like to express their appreciation to Eng. Raad Ahmed Abdullah deputy head of Salahuldeen Branch (OPDC) for their support in this study. They wish to extend their particular gratitude to Alnoor University for its support and cooperation throughout this research.

References

1. Deraz N M, Alarifi A, and Shaban A A. Removal of sulfur from commercial kerosene using nanocrystalline NiFe₂O₄ based sorbents. 2010; 14(4):357–362.,doi: 10.1016/j.jscs.2010.04.012.
2. Ahmedzeki NS and Ibrahim BJ. Reduction of Sulfur Compounds from Petroleum Fraction Using Oxidation-Adsorption Technique. Iraqi J. Chem Pet Eng.2015;16(1): pp. 35–48.
3. W Zhu W, Zhu b, Huaming Li, Yanhong C, Yonghui C, Guangying C, Changri H. Oxidative desulfurization of fuel catalyzed by metal-based surfactant-type ionic liquids. J Mol Catal A Chem. 2011;347(1–2):8–14. doi <https://doi.org/10.1016/j.molcata.2011.07.002>.
4. Tang X T, Hu JLi, Wang F, and Qing D.Desulfurization of kerosene by the electrochemical oxidation and extraction process. Energy & Fuels. 2015;29(4):2097–2103. doi:10.1021/ef502437m
5. Abdulqader M A, Salih H Y, Habeeb O A, Saber SEM, and Jasem A A. Clean char solid carbon fuel production via microwave processes of oily sludge produced at North Refineries Company Baiji. in AIP Conference Proceedings, AIP Publishing, 2023.
6. Ahmed Alwaise A M et al., “The effect of physical properties of lost petroleum quantities in vertical tanks at (NRC) Baiji. Energy Explor Exploit. 2023;42(2): 685-691.<https://doi.org/10.1177/014459872312209>
7. Mohammed MAQ, Humadi J, Issa YS, Ahmed M A, Aqar D A, Aabid A A, Abdulqade MA, Ahmed GS. Process Model Development and Optimal Kinetics for Fuel Desulfurization via a Novel Nano-Catalyst. Iran J Chem Chem Eng. 2024;43(11):3904-3917.10.30492/ ijce. 2024. 2027346.6567.
8. Raipure R. Desulphurisation of Kerosene by Adsorption. Interna J Innov Res Sci. Engine Techno. 2018;7(9):9417-9423.doi10.15680/ IJRSET. 8.0709016.
9. Hamed H, Mohammed M, Khalefa R, HABEEB O, and Abdulqader M.The Effect of using Compound Techniques (Passive and Active) on the Double Pipe Heat Exchanger Performance. Egypt J Chem.2021;64 (6):2797-2802.doi: 10.21608/ ejchem .2021.54450.3134.
10. Baradaran S. and Sadeghi MT. Desulfurization of non-hydrotreated kerosene using hydrodynamic cavitation assisted oxidative desulfurization (HCAOD) process. J Environ Chem Eng. 2020;8(4):103832.
11. Ahmed G S, Humadi J I, and Aabid A A.Mathematical Model, Simulation and Scale up of Batch Reactor Used in Oxidative Desulfurization of Kerosene. Iraqi J Chem Pet Eng. 2021;22(3):11–17.<https://doi.org/10.31699/IJCPE.2021.3.2>.
12. Novandy A. Evaluasi Uji Valuasi Uji Density Metode Astm D 1298 dan D 6822. Swara Patra. 2019; 9(1):1–6. <https://ejournal.ppsdmmigas.esdm.go.id/sp/index.php/swarapatra/article/view/192>
13. Ali B M, Salih M I, Abdulqader MA, Bakhavatchalam B, and Hussein O A. Dehydration and decarboxylation via pyrolysis process of waste oily sludge accumulated at North Refineries Company Baiji for use as a pyro-fuel. DesalinWater Treat. 2024;318 p. 100330, 2024. <https://doi.org/10.1016/j.dwt.2024.100330>.
14. Ibrahim MM, Abdulqader MA, and Alabdraba WMS. Physicochemical properties of hydrochar produced by hydrothermal carbonization of waste oily sludge. in AIP Conference Proceedings, AIP Publishing, 2024.
15. ASTM D. 86: Standard Test Method for Distillation of Petroleum Products and Liquid Fuels at Atmospheric Pressure,” Amer Soc Testing Materials, 2019.
16. Ashour MK and Elwardany A E. Addition of two kerosene-based fuels to diesel–biodiesel fuel: Effect on combustion, performance, and emissions characteristics of CI engine. Fuel, 2020;269:117473. <https://doi.org/10.1016/j.fuel.2020.117473>.
17. Mahmod Abdulqader S. Hassan S, Jawad A, and Habeeb O. Characterization Study of Petroleum Oily Sludge Produced from North Refineries Company Baiji to Determine the Suitability for Conversion into Solid Fuel. Egypt J Chem. 2021;64(6):2775-2781. doi: 10.21608/ejchem.2021.54222.3126. DOI:10.21608/ ejchem. 2021. 54222. 3126
18. Ji H, Liu S, Shi H, and Wang W. Phosphomolybdic acid-based sulfur-containing metal–organic framework as an efficient catalyst for dibenzothiophene oxidative desulfurization. J Sulfur Chem. 2022;43(3):314–326.<https://doi.org/10.1080/17415993.2022.2039142>
19. Justin A, Sundararaj K, Guna R, and William M. Experimental investigation of the effect of temperature on ignition of modified kerosene. Int J Engine Res.2022; 23(3):460–468. <https://doi.org/10.1177/1468087420988191>
20. Kim H I, Moon G, Choi I, Lee JY, and Jyothi R K. Hydrometallurgical process development for the extraction, separation, and recovery of vanadium from spent desulfurization catalyst bio-leach liquors. J Clean Prod.2018;187: 449–458.doi:10.1016/j.jclepro. 2018. 03.247
21. Shah I, Jing L, Fei ZM, Yuan YS, Farooq MU, and Kanjana N. A review on chemical modification by using sodium hydroxide (NaOH) to investigate the mechanical properties of sisal, coir and hemp fiber reinforced concrete composites. J Nat Fibers. 2022;19(13): 5133–5151.doi:10.1080/15440478.2021.1875359
22. Hossain R, Azad AK, Hasan MJ, and Rahman MM. Thermophysical properties of Kerosene oil-based CNT nanofluid on unsteady mixed convection with MHD and radiative heat flux. Eng Sci Technol an Int J. 2022;35:101095. doi:10.1016/j.jestch.2022.101095.